Indexing plunger with pull ring
Regular thread

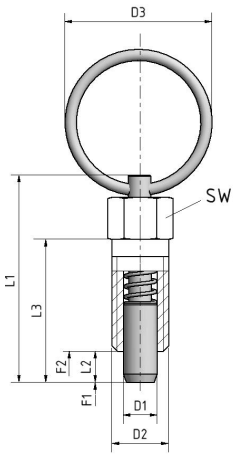

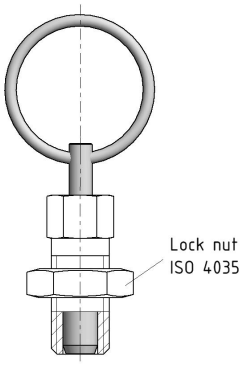

Art. No. Galvanized steel	Art. No. Stainless steel	D1	D2	D3	L1	L2 min.	L3	SW	Spring force Start F1 ≈ N	Spring force End F2 ≈ N
1-36-1006-B3	1-36-2006-B3	3	M6	14	23	4	12	6	3	12
1-36-1006-B4	1-36-2006-B4	4	M6	14	23	4	12	6	3	12
1-36-1008-B5	1-36-2008-B5	5	M8	18	30	5	16	8	5	24
1-36-1010-B6	1-36-2010-B6	6	M10	24	36	6	20	10	5	21
1-36-1012-B8	1-36-2012-B8	8	M12	30	44	8	24	12	6	22

All data in mm. Standard version ex stock. Other dimensions and materials are also possible on request.
We reserve the right to make design changes for technical/manufacturing reasons.

Material · Technical data

Pass tolerance	0.07 mm – 0.12 mm, precise positioning not possible
Housing	Galvanized steel and blue chrome-plated, 5.8 or stainless steel
Bolt	Stainless steel (hardened on request)
Spring	Stainless steel, reinforced version also possible
Ring	Stainless steel
Lock nut	DIN EN ISO 4035 Please specify when ordering: Version 1-36 without lock nut or 1-36K with lock nut
Thread lock	On request, based on standards DIN 267-28 / Fasteners with locking coating DIN 267-27 / Fasteners with adhesive and microencapsulated coatings Designation examples: poly-surface, precote, etc.

SDN Präzisionstechnik

SDN Präzisionstechnik GmbH

Siemensstraße 2
78588 Denkingen

T +49 7424 98 20 0
info@sdn-tec.com

www.sdn-tec.com